



CHIN-UP

H Y D R O P O N I C S

Professional one stop supplier for all hydroponics needs
2019 Australia&Europe E-catalog

HOW TO START BUSINESS WITH CHIN-UP

1.SELECT PRODUCTS

Review our catalog or pricelist and fill in the code/description and quantity with your purchasing plan. Our sales will calculate the total cost and volume/weight for your plan.

2.CONFIRM PI

Our sales will confirm with you for the details of the PI:

Product Details: Includes product details, quantity, price, package, etc.

Leading Time: From 7-25 days upon the receipt of deposit, depending on stock and your order.

Payment Terms: T/T (Telegraphic Transfer) for amount above 1,000USD , PAYPAL for sample order.

Trade Term: Usually it's FOB Ningbo, different port need higher cost.

Shipping Methods: Sea freight is the cheapest, but takes longest (14 days from Ningbo to Los Angeles). Air freight and UPS/FedEx/DHL only take 3-7 days, but are more expensive.

3.MAKE PAYMENT

Once the PI is confirmed, you need to transfer a 30% deposit before production, and the remaining balance before delivery. For orders less than \$5,000.00 USD, please transfer the full payment in one transaction to avoid fees from both sides.

4. ARRANGE DELIVERY

When the order is complete, you will need to find a shipping forwarder to arrange delivery; or we can arrange it on your behalf. Once land in your port, you can let your shipping forwarder present the documents including the B/L (Bill of Lading), Commercial Invoice, and Packing List to clear customs, and pay the import tariff and other charges.

WHAT WE CAN OFFER

FACTORY DIRECT

== SUPPLY COMPANY ==

Factory direct price to offer you the best price and get more sales margins

15+
YRS.
EXPERIENCE

Rich experience in manufacturing and exporting.
And our experienced R&D team provides you with
free OEM and ODM service

ONE STOP SHOP

We provide a full range of the hydroponics equipments to help you save time and costs in sourcing and supplier management



Controllable quality evaluation to decrease the defective rate of the goods before shipment.



Professional sales team provides you 24/7 service



Remarkable after-sales service

Visit us at www.chinuphydro.com

OUR FACTORY



Visit us at www.chinuphydro.com


CONTENTS

COVER & INTRODUCTION	1-4
CONTENTS	5
NEW PRODUCTS	6
LIGHTING	7-26
Complete Light System	7-12
1000W DE Complete Light System	7-8
630w CMH Complete Light System	9-10
315w CMH Complete Light System	11-12
Grow Light Reflector	12-14
315w CMH Reflector	12
DE Grow Light Reflector	13
SE Grow Light Reflector	14
Grow Light Ballast	15-17
1000w Electronic Ballast	15
1000w 0-10V Controllable Electronic Ballast	
Electronic Ballast Without Fan	
315w CMH Electronic Ballast	16
630w CMH DE Electronic Ballast	
630W CMH Electronic Ballast with Dual Outlet	
Magnetic Plastic Ballast	17
Magnetic Metal Ballast	
Open Magnetic Ballast	
Grow Light Lamps	18-20
1000w DE HPS Lamp	18
1000w Quick Start DE HPS Lamp	
1000w DE MH Lamp	19
630w DE CMH Lamp	
315w CMH Lamp	
Super HPS Lamp	20
MH Lamp	
T5 Fixture	21-23
T5 HO Fluorescent Fixture	21
T5 Grow Light Kit with Stand	22
T5 HO Fluorescent Tube	
T5 Led Fixture	23
LED integrated fixture with Stand	
T5 LED Tube	
Light Controller&Timer	24-25
Master Controller	24
Light Relay Controller with Timer	25
Light Relay Controller with Trigger Cord	
24 Hour Mechanical Timer	
Lighting Accessories	26-27



CLIMATE CONTROL	28-34
Inline Fan& Fan Speed Controller	28-29
Wall Fan& Clip Fan	30
Carbon Filter	31
Ducting&Clamp&Reducer	32
CO2&Ozone	33
Dehumidifier	34
GARDENING	35-43
Grow Tent	35
Germination	36
Dome&Tray&Insert	
Seedling Heat Mat	
Heat MatThermostat	
Tray/Reservoirs System	37
Flood Tray & Reservoirs	
Flood Tray Stand	
ABS Flood Tray with Rolling Bench	
Grow Pot	38
Fabric Pot	
Tan Fabric Pot	
Plastic Pot	
Saucer	
Drying Net/Rack	39
Drying Net with Zipper	
Detachable Drying Net	
Drying Net	
Square Stackable Drying Rack	
Clean Room	40
Clean Room Body Suit	
Plastic Shoe Cover	
Sticky Mats	
Disposable Scalpel	
Nitrile Glove	
Harvest Tool	41
Garden Tool	42
Meter	43

NEW PRODUCTS

1000W Commercial Lighting System


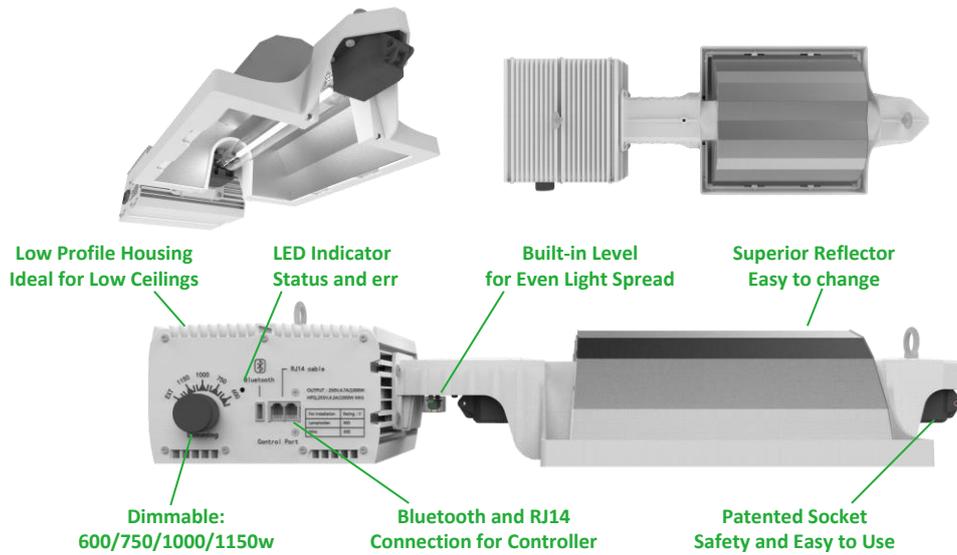


800W ARRAY8 LED

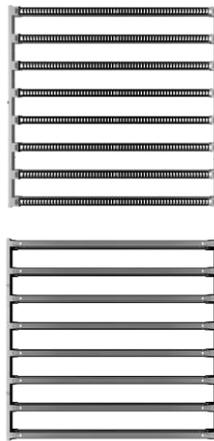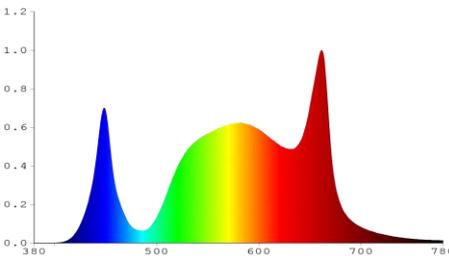

- Low profile with driver built-in perfect for low ceilings
- Ideal for vertical growth
- Heavy duty bracket with lock catch for easy detaching and maintenance
- Full spectrum, closest solution to the sunlight leading to more flowering sites and a fuller canopy
- 0-10 dimmable for best wattage output
- PAR 1840 $\mu\text{mol/s}$ and efficacy 2.3 $\mu\text{mol/J}$
- 1536pcs (192pcs per tube) Osram 1W Chip
- Dimensions: 127x123x10cm

640W OCT8 LED

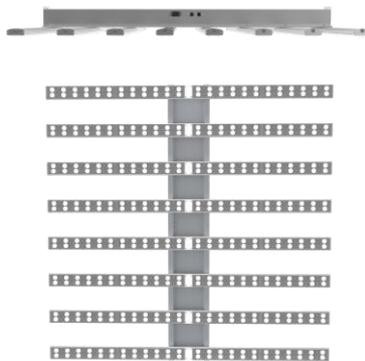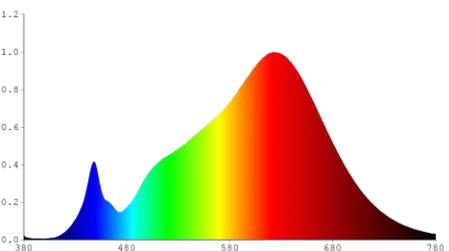

- Ultra-high PAR 2200 $\mu\text{mol/s}$ and efficacy 3.4 $\mu\text{mol/J}$
- Easy detaching and maintenance
- Lens module with high transparency adjust beam angle
- more than 2 times energy efficient than 1000w DE sodium lamp
- 0-10 dimmable for best wattage output
- 1536pcs (192pcs per tube) Cree 3030 1W Chip
- CCT: 2700K, CRI: 90
- Dimensions: 120x120x12cm

1000W DE COMPLETE LIGHT SYSTEM



1000w DE Light System -Enclosed

- Available voltage: 240v, 400v
- Enclosed style with more light gathering for plant
- Ultra high frequency ballast with high efficiency
- Dimmable output: 600w/750w/1000w/1150w
- Various style hoods easy for replacement
- Available in premium 95% reflectivity European (VEGA) aluminum, or Chinese aluminum
- Available in 0-10v controllable ballast
- 2.4m power cord included
- Patented DE socket
- 3 years warranty
- CODE: DF1000/E



Lamp can be included



Horizontal style available



0-10v Controllable ballast

1000w DE Light System

-Open

- Available voltage: 240v, 400v
- Open design for maximum light output, optimum heat management, and longer lamp life.
- Ultra high frequency ballast with high efficiency
- Dimmable output: 600w/750w/1000w/1150w
- Various style hoods easy for replacement
- Available in premium 95% reflectivity European (VEGA) aluminum, or Chinese aluminum
- Available in 0-10v controllable ballast
- 2.4m power cord included
- Patented DE socket
- 3 years warranty
- CODE: DF1000/O



Lamp can be included



Horizontal style available



0-10v Controllable ballast

1000W DE COMPLETE LIGHT SYSTEM

1000w DE Light System

-Compatible

- Available voltage: 240v, 400v
- Versatile style compatible with enclosed and open style
- Dimmable output: 600w/750w/1000w/1150w
- Various style hoods easy for replacement
- Available in premium 95% reflectivity European (VEGA) aluminum, or Chinese Aluminum
- Available in 0-10v controllable ballast
- 2.4m power cord included
- Patented DE socket
- 3 years warranty
- CODE: DF1000/C



Lamp can be included



Horizontal XL style available



0-10v Controllable ballast



1000w DE Light System

-Adjustable




- Available voltage: 240v, 400v
- Adjustable function, beam angle and light spread area can be easily adjusted for different usage
- Dimmable output: 600w/750w/1000w/1150w
- Various style hoods easy for replacement
- Available in premium 95% reflectivity European (VEGA) aluminum, or Chinese Aluminum
- Available in 0-10v controllable ballast
- 2.4m power cord included
- Patented DE socket
- 3 years warranty
- CODE: DF1000/A



Narrow

Normal

Wide



Lamp can be included



Adjustable XL style available



0-10v Controllable ballast

630W CMH COMPLETE LIGHT SYSTEM

630w CMH Light System

-Enclosed

- Input voltage: 240v
- Enclosed style with more light gathering for plant
- Low-Frequency Square Wave Ballast
- PGZX18 socket suit for varies 315watt CMH lamps
- Dimmable output: 380w/480w/630w/Super
- Various style hoods easy for replacement
- Available in premium 95% reflectivity European (VEGA) aluminum, or Chinese aluminum
- Available in 0-10v controllable ballast
- 2.4m power cord included
- 3 years warranty
- CODE:CF630/E



Lamp can be included



DE 630w style available




0-10v Controllable ballast

630w CMH Light System

-Open

- Input voltage: 240v
- Open design for maximum light output, optimum heat management, and longer lamp life.
- Low-Frequency Square Wave Ballast
- PGZX18 socket suit for varies 315watt CMH lamps
- Dimmable output: 380w/480w/630w/Super
- Various style hoods easy for replacement
- Available in premium 95% reflectivity European (VEGA) aluminum, or Chinese aluminum
- Available in 0-10v controllable ballast
- 2.4m power cord included
- 3 years warranty
- CODE:CF630/O

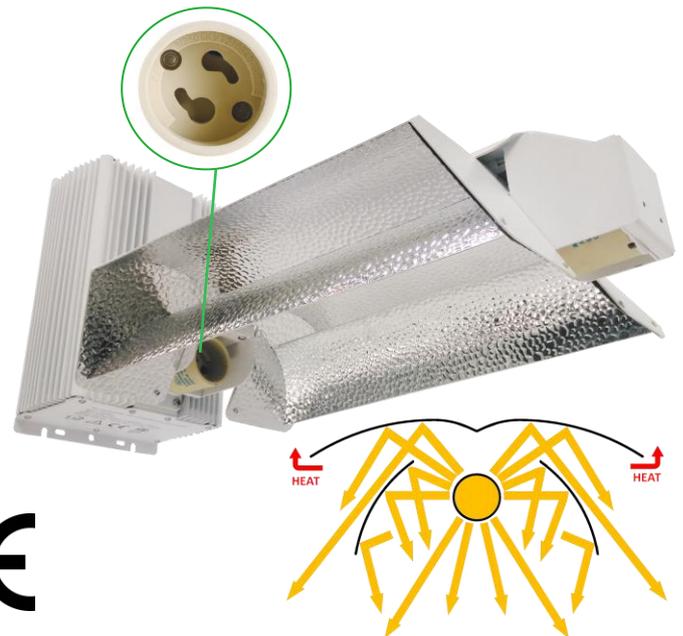

Lamp can be included



DE 630w style available



0-10v Controllable ballast

630W CMH COMPLETE LIGHT SYSTEM

630w CMH Light System

-Compatible

- Input voltage: 240v
- Versatile style compatible with enclosed and open style
- Low-Frequency Square Wave Ballast
- PGZX18 socket suit for varies 315watt CMH lamps
- Dimmable output: 380w/480w/630w/Super
- Various style hoods easy for replacement
- Available in premium 95% reflectivity European (VEGA) aluminum, or Chinese aluminum
- Available in 0-10v controllable ballast
- 2.4m power cord included
- 3 years warranty
- CODE:CF630/C



Lamp can be included



DE 630w style available



0-10v Controllable ballast



630w CMH Light System




-Adjustable

- Input voltage: 240v
- Adjustable function, beam angle and light spread area can be easily adjusted for different usag
- Low-Frequency Square Wave Ballast
- PGZX18 socket suit for varies 315watt CMH lamps
- Dimmable output: 380w/480w/630w/Super
- Various style hoods easy for replacement
- Available in premium 95% reflectivity European (VEGA) aluminum, or Chinese aluminum
- Available in 0-10v controllable ballast
- 2.4m power cord included
- 3 years warranty
- CODE:CF630/A

Narrow

Normal

Wide



Lamp can be included



DE 630w style available



0-10v Controllable ballast

315W CMH COMPLETE LIGHT SYSTEM

315w CMH Light System- Enclosed

- Input voltage: 240v
- **LOW HEAT:** It is important to keep grow room at an ideal temperature. CMH grow lights run much cooler than traditional lights. Because of the low heat output, they are perfect for small spaces like tents, closets or spare rooms.
- **FULL SPECTRUM LIGHT:** Plants evolved to use the entire range of sunlight-both short and long wavelengths. CMH grow lights provide full spectrum, one bulb can be used for both veg and bloom stages, during a full-cycle growing.
- **ENERGY EFFICIENT HIGH YIELD:** There is no doubt that the most important attribute of any bulb is its yield per watt. Compare with traditional MH or HPS bulbs, CMH grow lights produce an equivalent amount of light at about half watts!
- No dimmable
- Hammered german aluminum to provide uniform light output and over 90% light efficiency
- 2.4m Power cord included
- PGZ18 ceramic lamp socket
- Only suitable with 315w cmh lamps
- 3 year warranty
- CODE: CF315/E



More style available:



315w CMH Light System-
Open

Open design for optimum heat management and longer lamp life
CODE: CF315/C



315w CMH Light System-
Compatible

Versatile style compatible with enclosed and open style
CODE: CF315/C



315w CMH Light System-
Adjustable

Adjustable function, beam angle and light spread area can be easily adjusted for different usage
CODE: CF315/A

315W CMH LIGHT FIXTURE

315w CMH Light Fixture

- Input voltage: 240v
- Developed all-in-one light system designed to optimize yield with lower operating temperature and lower energy consumption compared to other HID's.
- PGZ18 Socket suit for varies 315w CMH lamps
- Low frequency digital ballast internals are fully sealed with thermal conductive gel to protect the internals from heat and the elements to ensure longevity over many grow cycles.
- High reflective grade aluminum to ensure the most light is distributed down to the plant canopy below.
- 2.4m power cord included
- CE listed with 3 year warranty



315w CMH Light Fixture-horizontal
CODE: CF315/H



315w CMH Light Fixture-Vertical
CODE: CF315/H



315w CMH Reflector-Horizontal

- 315w CMH reflector without ballast built-in
- PGZ18 Socket suit for varies 315watt CMH lamps
- High reflective grade aluminum to ensure the most light is distributed down to the plant canopy below.
- 3m pre-wire cord included
- CE listed with 5 year warranty
- CODE: RHX-CR315H




315w CMH Reflector-Vertical

- Vertical lamp optimizes downward light delivery
- 315w CMH reflector without ballast built-in
- PGZ18 Socket suit for varies 315watt CMH lamps
- High reflective grade aluminum to ensure the most light is distributed down to the plant canopy below.
- 3m pre-wire cord included
- CE listed with 5 year warranty
- CODE: RHX-CR315V



SE GROW LIGHT REFLECTOR

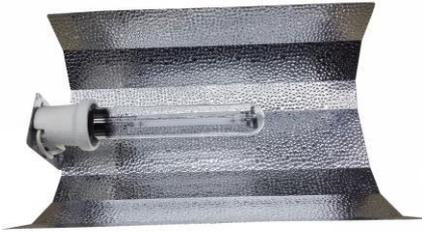

1. Euro Wing Reflector

- Hammered aluminum reflector sheet
- E40 ceramic socket
- Size: 47x47cm
- Cord: 4 meter 0.75m2 cable + IEC plug
- CODE: RHX-WL9



2. Cool Tube Wing Reflector

- Connecting Flange Material: PC Plastic
- High reflective hammered aluminum
- E40 ceramic socket
- 125mm size: 125mm(φ)x450mm(L)
- 150mm size: 150mm(φ)x490mm(L)
- CODE: RHX-CT6, RHX-CT8



3. Adjustable A-Wing Reflector

- Hammered aluminum reflector sheet
- Adjustable ceramic E40 socket
- S size: 62 x 55 x 18cm
- L size: 80 x 65 x 23cm
- Cord: 3meter 1.00m2 cable + IEC plug
- CODE: RHX-ADW-S, RHX-ADW-L



4. Cool Tube Hood

- Easy set up in 2 minutes
- Fully glued vents with cool tube glass assure 100% heat isolate and air cooling
- 150mm Size: 67 x 64 x 18cm
- 200mm size: 80 x 80 x 23cm
- CODE: RHX-CTH6, RHX-CTH8



5. Umbrella Reflector

- Vertical or horizontal lamp holder
- White coated or silver hammered high reflective aluminum
- Size: diameter 42" or diameter 48"
- Cord: 3meter 1.00m2 cable + IEC plug
- CODE: RHX-A1, RHX-A12






6. Smart Air Cooled Reflector

- Metal housing with white finish
- Super reflective STUCCO interior
- 125mm Size: 59.5 x 38 x 19cm
- 150mm Size: 61.5 x 44 x 20cm
- 200mm Size: 61.5 x 46 x 25cm
- CODE: RHX-RS5, RHX-RS6, RHX-RS8



DE GROW LIGHT REFLECTOR

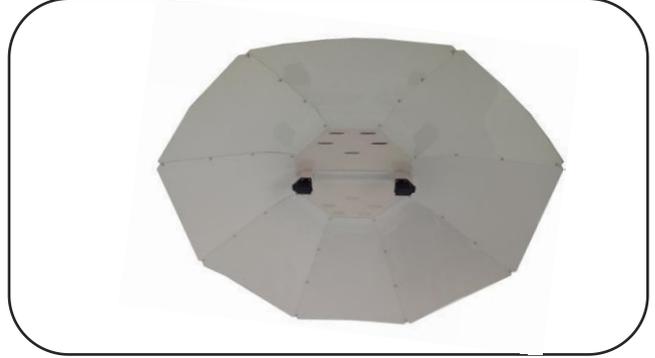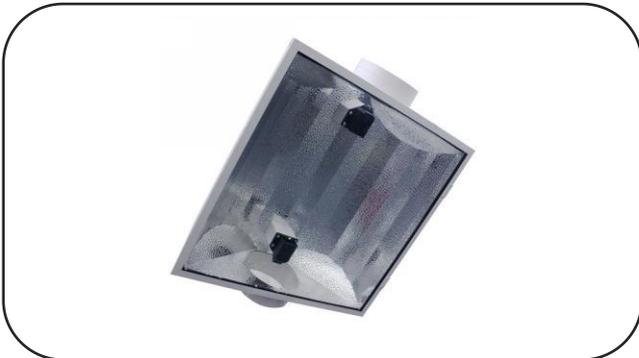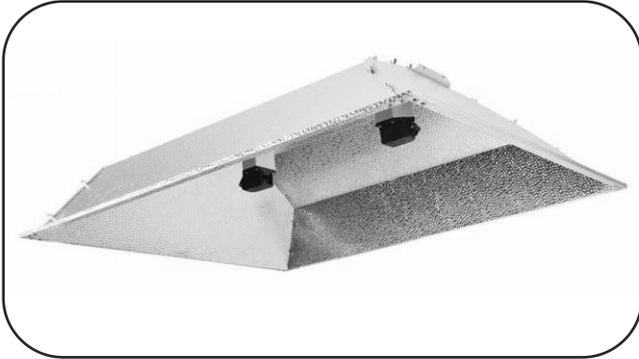

1. DE Wing Reflector

- DE plastic socket
- High reflective hammered aluminum
- Cord: 3meter 1.00m2 cable + IEC plug
- Size: 45x40x19cm
- CODE: RHX-WDM



2. DE Adjustable Wing Reflector

- High reflective hammered aluminum
- DE plastic socket
- M size: 62 x 55 x 18cm
- L Size: 72x65x23cm
- CODE: RHX-WLM, RHX-WLL



3. DE Simple Hood Reflector

- High reflective hammered aluminum
- M Size: 76.5 x 66 x 20cm
- L Size: 91.5 x 79 x 21cm
- Cord: 3meter 1.00m2 cable + IEC plug
- CODE: RHX-SDM, RHX-SDL



4. DE Cool Tube Hood

- Fully glued vents with cool tube glass assure 100% heat isolate and air cooling
- Cord: 3meter 1.00m2 cable + IEC plug
- 150mm Size: 67 x 64 x 18cm
- 200mm size: 80 x 80 x 23cm
- CODE: RHX-CTH6, RHX-CTH8



5. DE Smart AC Reflector

- Completely sealed with neoprene gaskets and hinged glass
- High reflective aluminum
- 125mm Size: 59.5 x 38 x 19cm
- 150mm Size: 61.5 x 44 x 20cm
- 200mm Size: 61.5 x 46 x 25cm
- CODE: RHX-RS5, RHX-RS6, RHX-RS8



6. DE Umbrella Reflector

- DE plastic socket
- White coated or silver hammered high reflective aluminum
- Size: diameter 42"
- Cord: 3meter 1.00m2 cable + IEC plug
- CODE: RHX-AD1, RHX-AD2



GROW LIGHT BALLAST



CE

1000w Electronic Ballast

- Advanced ultra high frequency technology, 15% more light featuring .
- Special Design for 1000w DE Lamp, Compatible with all DE and SE Lamp in the market
- Dimmable output: 600w/750w/1000w/1150w,
- Input Voltage: 240v,400v
- 2.4m power cord included
- 3 years warranty
- CODE: EB1000

1000w 0-10V Controllable Electronic Ballast

- Advanced ultra high frequency technology, 15% more light featuring
- Special design for 1000w DE Lamp, compatible with all DE and SE Lamp in the market
- Dimmable output: 600w/750w/1000w/1150w
- Input voltages: 240v,400v
- Controllable with max. 200pcs
- 2.4m power cord included
- 3 years warranty
- CODE: EB1000-DIM



CE

Electronic Ballast Without Fan

- Input voltage: 240v, 400v
- Dimmable Output: 50%, 75%, 100%, super lumens
- Compatible with E40 400w/600w HPS and MH bulbs
- High frequency output results in less power loss, 30% more lumens than magnetic ballasts for improved yields
- Short circuit protection, Open circuit protection, Ignition failure protection, Thermal protection, End of lamp life(EOL) protection
- 2.4m power cord included
- Available Color: white, black, purple, green
- 3 years warranty
- Input wattage available: 400w, 600w
- CODE: EB400F EB600F



CE

GROW LIGHT BALLAST

315w CMH Electronic Ballast

- Advanced low frequency technology for 315w CMH lamps
- Short circuit protection
- Open circuit protection
- Ignition failure protection
- Thermal protection
- End of lamp life(EOL) protection
- 2.4m cord included
- Input Voltage: 240v
- CODE: EB315L



630w CMH DE Electronic Ballast

- Advanced low frequency technology for DE 630w CMH lamps
- Short circuit protection
- Open circuit protection
- Ignition failure protection
- Thermal protection
- End of lamp life(EOL) protection
- Dimmable output: 380w/480w/630w/Super
- 2.4m cord included .
- Input Voltage: 240v
- 3 years warranty
- CODE: EB630L

630W CMH Electronic Ballast with Dual Outlet

- Designed to work with 315w CMH lamps
- Advanced low frequency technology for CMH lamps
- Short circuit protection
- Open circuit protection
- Ignition failure protection
- Thermal protection
- End of lamp life(EOL) protection
- 2.4m power cord included
- Input voltage : 240v
- 3 years warranty
- CODE: EB630L-2



GROW LIGHT BALLAST



Magnetic Plastic Ballast

- Produces low heat levels
- Plastic-cased magnetic ballast, supplied with a flying IEC lead
- Workable with HPS bulbs only
- No dimmable
- Voltage Input Range: 220–240v, AC/50Hz
- Available Input Wattage: 400w, 600w
- 1.7m power cord included
- 3 years warranty
- CE approved
- CODE: RHX-MBP400 RHX-MBP600

Magnetic Metal Ballast

- Produces low heat levels
- Metal-cased magnetic ballast, supplied with a flying IEC lead
- Workable with HPS bulbs only
- No dimmable
- Voltage Input Range: 220–240v, AC/50Hz
- Available Input Wattage: 400w, 600w
- 1.7m power cord included
- 3 years warranty
- CE approved
- CODE: RHX-MBS400 RHX-MBS600





Open Magnetic Ballast

- Workable with HPS bulbs only
- Open model without outer housing for cooler temperature
- No dimmable
- Voltage Input Range: 220–240v, AC/50Hz
- Available Input Wattage: 400w, 600w
- 1.7m power cord included
- 3 years warranty
- CE approved
- CODE: RHX-MBO400 RHX-MBO600

GROW LIGHT LAMPS

1000w DE HPS Lamp

- Most classical and popular choice for grower
- Provides 35% more available energy than standard HPS lamp, 2100K, 155,000lumens, PAR=2100umol/s
- Peaks in the Far-red range to stimulate metabolic activity in flowering .
- Long useable life: 90% at 10,000 hours.

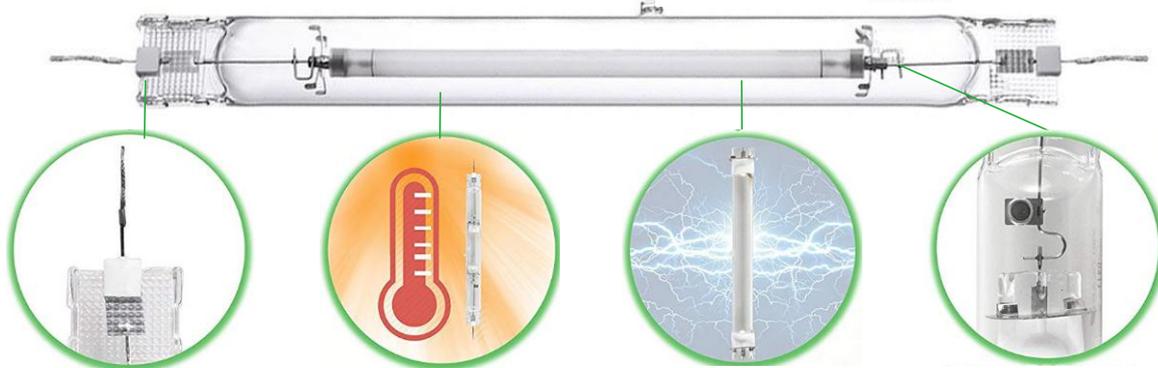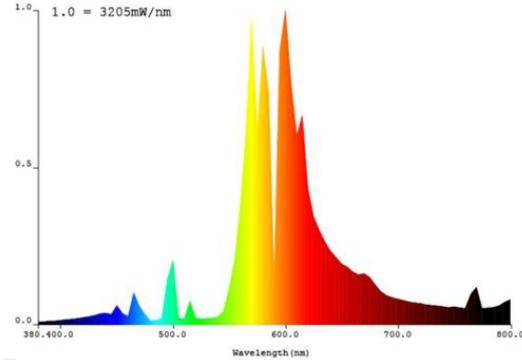


PREMIUM CONDUCTIVE LEADS

HEAT RESISTANT GLASS

HIGHLY EFFICIENT ARCTUBE


STAINLESS STEEL ARMATURE

Spectral distribution (per 5nm)

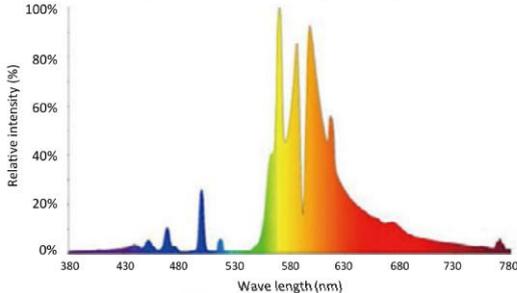

1000w Quick Start DE HPS Lamp

- Three spring for quick start design.
- Spectral distribution optimized for photosynthesis efficiency.
- Superior μmol output within the PAR spectral range (Photosynthesis Active Radiation) Economic (long average life, high μmol output, low energy consumption)
- Provides 35% more available energy than standard HPS lamp, 2100K, 155,000lumens, PAR=2100umol/s
- Peaks in the Far-red range to stimulate metabolic activity in flowering .
- Long useable life: 90% at 10,000 hours.

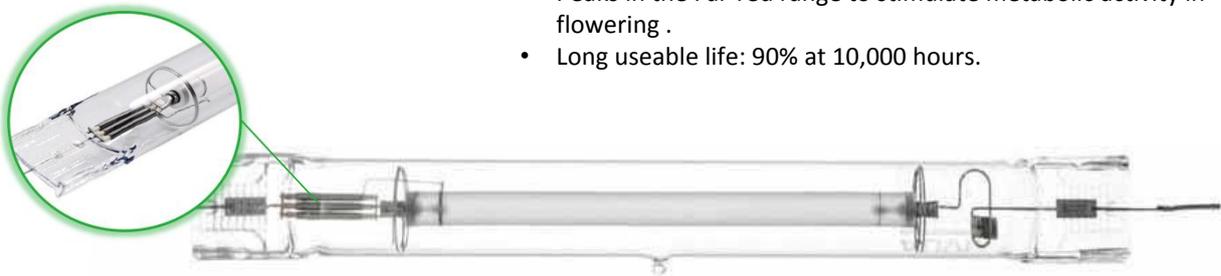


CODE	DESCRIPTION	LUMENS	COLOR TEMP	CRI	PAR VALUE ($\mu\text{mol/s}$)	RATED LIFE	CASE QTY
DHPS600	600W double ended HPS Lamp	10500	2100	32	1150	10,000 Hours	25
DHPS1000	1000W double ended HPS Lamp	15500	2100	32	2050	10,000 Hours	25
DHPS1000Q	1000W double ended HPS Lamp	15500	2100	32	2100	10,000 Hours	25

GROW LIGHT LAMPS




1000w DE MH Lamp

- Optimized spectrum provide high initial and maintained lumen output for vegetative growth.
- brighter and last longer than standard single ended light bulbs, giving you an intense blue spectrum you just don't get out of standard HID's
- Long useable life: 90% at 10,000 hours.

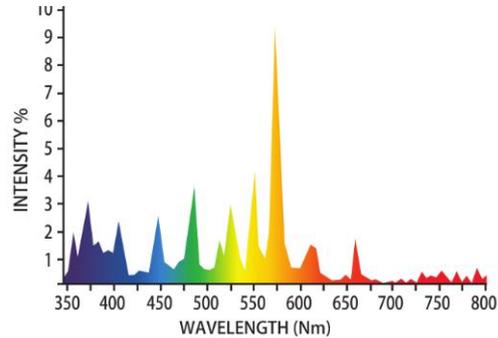

630w DE CMH Lamp

- Produces more PAR per watt than standard Metal Halide.
- Richest spectrum on the market.
- CRI of 90 makes this lamp the closest solution to sunlight available.
- Promotes extremely tight internodal spacing, leading to more flowering sites and a fuller canopy.
- Offers significant improvement in spectral quality over standard Metal Halide.

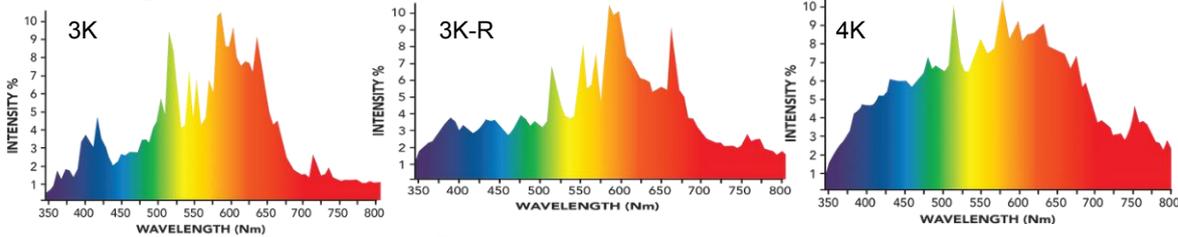

315w CMH Lamp

- Richest spectrum on the market with a CRI of 98, makes this lamp the closest solution to the sunlight available
- Promotes extremely tight internodal spacing, leading to more flowering sites and a full canopy
- Offers significant improvement in spectral quality and produce more PAR per watt than standard MH lamp
- 3K 3K-R 4K with customized available for choice.


CODE	DESCRIPTION	LUMEN S	COLOR TEMP	CRI	PAR VALUE (μmol/s)	RATED LIFE	CASE QTY
DMH1000	1000W double ended MH Lamp	10000	6400	70	1350	10,000 Hours	25
CMH630	630W double ended CMH Lamp	78500	3K,3K-R,4K	90	1200	10,000 Hours	25
CMH630P	630W double ended CMH Lamp (EU PCA)	78500	3K,3K-R,4K	90	1200	10,000 Hours	25
CMH315	315W CMH Lamp	33000	3K,3K-R,4K	98	540	10,000 Hours	25
CMH315P	315W CMH Lamp(EU PCA)	33000	3K,3K-R,4K	98	540	10,000 Hours	25

GROW LIGHT LAMPS

Super HPS Lamp



- High lumens output, compatible with electronic and magnetic ballast, E40 Base
- Designed specifically for Professional Hydroponic Plant Cultivation
- CCT 2,100K, Optimized red & orange spectrum and high PAR (Photosynthetic Active Radiation) to stimulate flower growth and enhance fruiting
- Maintaining over 90% of initial lumen output after running for 5,000 hours
- Long bulb life: 24,000 hours. New long lasting life with a high lumen output and high power efficiency. 1 year warranty

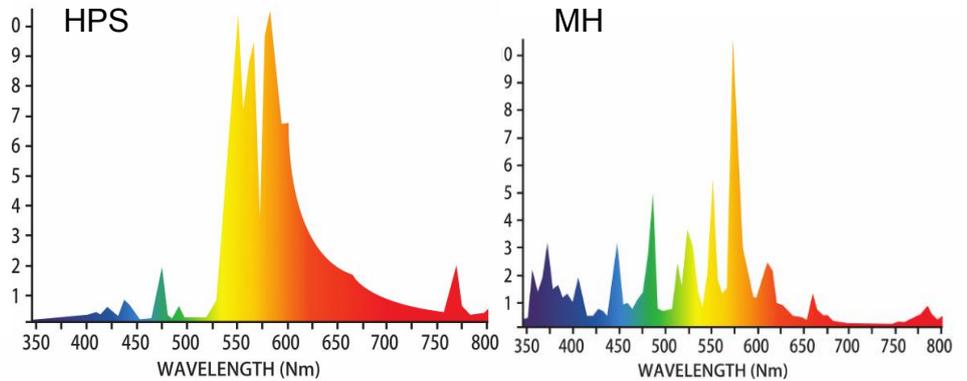

MH Lamp

- 6,000K blue & violet spectrum and high PAR (Photosynthetic Active Radiation) to stimulate vegetative growth
- Ideal for rapid growth phase of plants. Greatly enhances all-around plant growth to stimulate vegetative growth
- Extra-low lumen depreciation: maintaining over 90% of initial lumen output after running for 5,000 hours
- Startup time: allow 3-5 mins for full bright. Please wait at least 5 mins after power shut off before striking again
- Long bulb life: 10,000 hours. New long lasting life with a high lumen output and low energy consumption. 1 year warranty



CODE	DESCRIPTION	LUMENS	COLOR TEMP	CRI	PAR VALUE (μmol/s)	RATED LIFE	CASE QTY
HPS1000	1000W HPS Lamp	146000	2100	25	1850	24,000 Hours	12
HPS600	600W HPS Lamp	90000	2100	25	1050	24,000 Hours	25
HPS400	400W HPS Lamp	56000	2100	25	700	24,000 Hours	25
MH1000	1000W MH Lamp	95000	6000	70	1350	10,000 Hours	20
MH600	600W MH Lamp	58000	6000	65	810	10,000 Hours	20
MH400	400W MH Lamp	36000	6000	70	500	10,000 Hours	25


T5 FLUORESCENT FIXTURE

T5 HO Fluorescent Fixture

- Input Voltage: 240v
- Professional grow lighting system with 95% reflectivity aluminum
- Metal housing with mirror aluminum built-in
- High light output, 30% more light output vs comparable systems
- Daisy chain outlet built-in
- On-off switch built-in to control the lamps
- Two heavy duty hangers built-in on the top
- Comes with premium quality 2700/6400k lamps
- 2.4m power cord
- Available Color: white and black
- 3 years warranty



CE

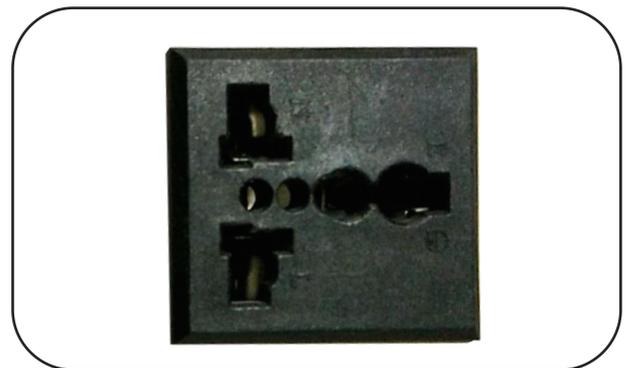


CODE	DESCRIPTION	LUMENS	POWER (W)	VOLTAGE FREQUENCY	PACKAGE	MAX. CHAINED
T54X8	T5 54W with 8 HO bulbs	40,000	432	240V/50Hz	122x68.5x10cm	3
T54X6	T5 54W with 6 HO bulbs	30,000	324	240V/50Hz	122x56x10cm	3
T54X4	T5 54W with 4 HO bulbs	20,000	216	240V/50Hz	122x41x10cm	5
T52X4	T5 24W with 4 HO bulbs	8,000	96	240V/50Hz	62x41x10cm	6
T52X2	T5 24W with 2 HO bulbs	4,000	48	240V/50Hz	62x27.5x10cm	12

T5 GROW LIGHT KIT WITH STAND

T5 Grow Light Kit with Stand

- High output with 95% reflectivity aluminum
- Single or dual lamp for different choice
- 1.8m power cord with ON/OFF switch for 240V
- Comes with premium quality 2700/6400k lamps
- Available Color: white and black

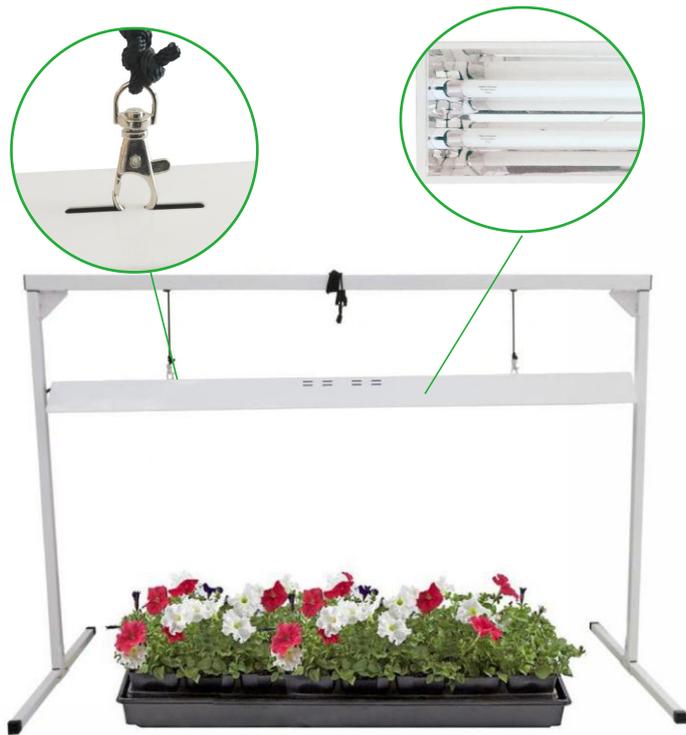

T5 HO Fluorescent Tube

- 54w/24W with 5,000/2,000 lumens
- 2700K or 6400K for choice
- Rated average life : 10,000 hours
- 1 year warranty.



CODE	DESCRIPTION	LUMENS	POWER (W)	VOLTAGE FREQUENCY	PACKAGE
T5-2K	24w T5 stand kit single bulb	2,000	24	240V/50HZ	69x16.5x7.5cm
T5-2KX2	24w T5 stand kit dual bulb	4,000	48	240V/50HZ	69x19.5x7.5cm
T5-4K	54w T5 stand kit single bulb	5,000	54	240V/50HZ	129x16.5x7.5cm
T5-4KX2	54w T5 stand kit dual bulb	10,000	108	240V/50HZ	129x19.5x7.5cm
RHX-T24	24W HO T5 Lamp, 2700K or 6400K	2,000	24	/	58x20x19cm 100pcs/ctn
RHX-T54	54W HO T5 Lamp, 2700K or 6400K	5,000	54	/	118x20x19cm 100pcs/ctn

T5 LED FIXTURE

4FT T5 LED Fixture

- Increased PAR output and reduced power consumption.
- At 30 watts, 45% energy savings versus a 54 watt fluorescent electronic ballasts.
- Proprietary phosphor technology provides optimized color output.
- 3 years warranty




LED integrated fixture with Stand

- High output LED tube integrated with fixture
- High 95% Reflectivity aluminum
- 1.8m power cord for 240v.
- Comes with premium quality single&dual lamps.
- 3 year warranty.

T5 LED Tube

- 24W with 3000lumens
- Rated lifetime : 50,000hr
- UL listed

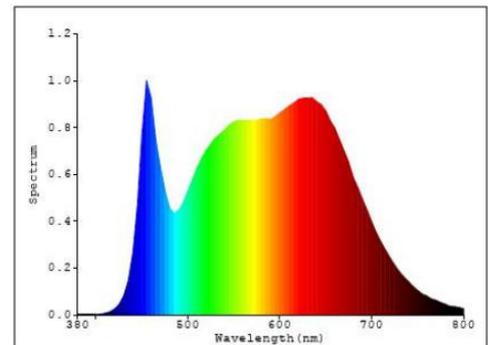

CODE	DESCRIPTION	LUMENS	POWER (W)	VOLTAGE FREQUENCY	PACKAGE	MAX. CHAINED
T54X8-2	T5 4FT LED with 8 bulbs	24,000	192	240V/50Hz	122x68.5x10cm	5
T54X6-2	T5 4FT LED with 6 bulbs	18,000	144	240V/50Hz	122x56x10cm	7
T54X4-2	T5 4FT LED with 4 bulbs	12,000	96	240V/50Hz	122x41x10cm	10
T5-4KLX2	T5 4FT LED Stand fixture dual bulb	6,000	48	240V/50Hz	129x19.5x7.5cm	20
T5LED24	24w LED tube,full spectrum	3,000	24	240V/50Hz	120x10x14cm 24pcs/carton	/

MASTER CONTROLLER


0-10V Master Controller

- No need for a switchboard
- Easy and safe installation (low voltage device)
- Protected against short circuit
- Double temperature safety feature
- Control up to 200 ballasts
- Show output as W or %
- Auto shutdown at temperature, time and humidity setting
- Wifi blue-tooth control function
- Temperature and humidity sensors, RJ 11 cables included
- 5 year warranty
- Code: DE-SCP-01



A 1000W ON		B 1000W ON	
50%	500 W	115%	1150 W
00°C	00%th	00°C	00%th
On: 16:10		On: 13:20	
Off: 11:10		Off: 13:30	
Off: 50 °C		Off: 50 °C	
Off: 100%th		Off: 100%th	
06:36:33		Units: °C	
		← → : Move ↑ ↓ : Set	

Connect Phone with your controller

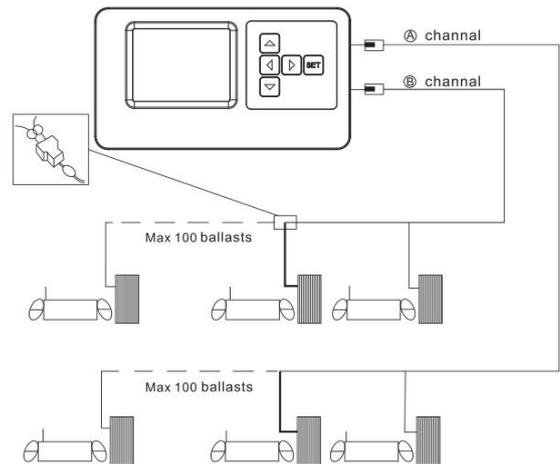

LIGHT CONTROLLER&TIMER

UK Timer Light Contactor

- Total maximum capacity not to exceed 26amps
- Available Outlets: 4ways, 6ways, 8ways
- 2 input plugs
- Top quality components and construction
- Heavy Duty rubberised moulded plugs
- Switchable sockets
- 24 hour timer



EU Timer Light Contactor

- Total maximum capacity not to exceed 26amps
- Available Outlets: 4ways, 6ways, 8ways
- 2 input plugs
- 24 hour timer
- Top quality components and construction
- Heavy Duty rubberised moulded plugs
- Housed in a tough moisture resistant metal box

24 Hour Mechanical Timer

- 15 Minute On/Off,24 HOUR Setting.
- 220-240VAC, 16A, 50 Hz, 3500W
- Automates fans, lamps, lights, sprinklers, and other electronics to help reduce energy and save money. Indoor use only
- Material: PC
- Code: RHX-TM24



CODE	DESCRIPTION	MAX. POWER(W)	VOLTAGE FREQUENCY	PACKAGE
RHX-LC4	240V UK Light Controller with Timer, 4 Outlets	6000	240V 50HZ	29x19.5x16.5cm 1pc/ctn
RHX-LC6	240V UK Light Controller with Timer, 6 Outlets	6000	240V 50HZ	38.5x19.5x16.5cm 1pc/ctn
RHX-LC8	240V UK Light Controller with Timer, 8 Outlets	6000	240V 50HZ	48x19.5x16.5cm 1pc/ctn
RHX-LC4-3	240V EU Light Controller with Timer, 4 Outlets	6000	240V 50HZ	24x32x12cm 1pc/ctn
RHX-LC6-3	240V EU Light Controller with Timer, 6 Outlets	6000	240V 50HZ	29x32x12cm 1pc/ctn
RHX-LC8-3	240V EU Light Controller with Timer, 8 Outlets	6000	240V 50HZ	34x32x12cm 1pc/ctn
RHX-TM24	24HOURS MECHANICAL TIMER Blister package	3500	120V 60HZ	24.8"(L) x 18.7"(W) x 10.6"(H) 63x47.5x27 48pcs/ctn

LIGHTING ACCESSORIES



83" Light Mover

- 10 RPM Grow Light Mover Kit.
- 120volts; 8000 watts maximum
- Travels approx. 4 feet per minute
- 0 to 60 second adjustable time delay
- Handles reflectors up to 50 pounds
- CODE: RHX-LM83



1/8" Rope Ratchet

- Metal caribiner & Metal Gear
- 2.35m braided polypropylene rope
- Secures items quickly and easily
- 68KG/150LBS Capacity per pairs
- 1pair/polybag
- CODE: RHX-PP8



1/4" Rope Ratchet

- Metal caribiner & Metal Gear
- 2.5m braided polypropylene rope
- Secures items quickly and easily
- 68KG/150LBS Capacity per pcs
- 1pair/polybag
- CODE: RHX-PP4



Grow Yoyo (Pairs)

- Stainless steel spring
- Up to 22 lbs weight load capacity per pair
- Maximum Extension Length: 45"
- The simplest easy height adjustment
- CODE: RHX-ER



Panda Film

- 10ftx100ft 6mil Panda Black & White Film
- CODE: RHX-BWF100



Bubble Film

- 4ftx100ft Foil Barrier Bubble Film, laminated between 2 layers of foil
- CODE: RHX-FBF100



LED HEADLIGHT

- 19 high-intensity LED lamps with different settings
- CODE:RHX-HLED19



LED FLASHLIGHT

- 9 powerful high-intensity LED lamps
- CODE:RHX-FLED9



Growroom Glasses

- Interchangeable Anti-Glare UV Lenses, Two Sets for HID and LED
- CODE: RHX-GRG2IN1

LIGHTING ACCESSORIES



CFL Lamp Holder Cord With UK Plug

- E40 Ceramic CFL Lamp Holder
- Fully Insulated Solid Metal Cap Fitting
- With 4mx1mm2 cord with UK 3 pin plug
- CODE: RHX-LCC40/U



CFL Lamp Holder Cord With EU Plug

- E40 Ceramic CFL Lamp Holder
- Fully Insulated Solid Metal Cap Fitting
- 4mx1mm2 cord with EU standard plug
- CODE: RHX-LCC40/E



CFL Lamp Holder Cord With AUS Plug

- E40 Ceramic CFL Lamp Holder with Hanging Hook.
- Fully Insulated Solid Metal Cap Fitting
- 4mx1mm2 cord with AUS standard plug
- CODE: RHX-LCC40/A



Power Cord With UK Plug

- 1.8 Meter 3Cx0.75mm2
- UK plug to IEC femal plug
- CODE: RHX-UKPC



Power Cord With EU Plug

- 1.8 Meter 3Cx0.75mm2
- EU standard plug to IEC femal plug
- CODE: RHX-EUPC



Power Cord With AUS Plug

- 1.8 Meter 3Cx0.75mm2
- AUS standard plug to IEC femal plug
- CODE: RHX-AUPC



240V Power Cord With Italian Plug

- 1.8 Meter 3Cx0.75mm2
- Italian 3 prong plug to IEC femal plug
- CODE: RHX-UKPC



IEC Extention Cord

- 4 Meter 3Cx0.75mm2
- IEC male to femal
- CODE: RHX-PAP



PGZ18 Socket Adapter

- E40 to PGZ18 adapter
- 5KV mogul base soket
- Voltage: 250V, soket current: 5A
- CODE: RHX-EPA

VENTILATION/FAN



Inline Fan with Cover

- Quiet operation
- Durable ceramic-coated metal housing
- High quality molded impeller
- Thermally protected AC motor
- Includes mounting brackets
- Includes 2.4m pre-wired 240V cord

CODE	DESCRIPTION	VOLTAGE FREQUENCY	AIRFLOW M ³ /H	PACKAGE
RHX- IF4L	4" INLINE FAN	220V/50HZ	300m ³ /h	31x26x24cm 1pc/ctn
RHX- IF6L	6" INLINE FAN	220V/50HZ	620m ³ /h	36x36x25cm 1pc/ctn
RHX- IF8L	8" INLINE FAN	220V/50HZ	1000m ³ /h	40x37x30cm 1pc/ctn

Inline Fan

- Powder coated metal housing ,galvanized sheet impeller.
- Aerodynamic design
- High efficiency , low noise
- CE certificate for the whole fan



CODE	DESCRIPTION	VOLTAGE FREQUENCY	AIRFLOW M ³ /H	PACKAGE
RHX- IF4	4" INLINE FAN	220V/50HZ	280m ³ /h	32x25.5x26cm 1pc/ctn
RHX- IF6	6" INLINE FAN	220V/50HZ	598m ³ /h	40x35x27cm 1pc/ctn
RHX- IF8	8" INLINE FAN	220V/50HZ	958m ³ /h	40x35x27cm 1pc/ctn
RHX- IF10	10" INLINE FAN	220V/50HZ	1184m ³ /h	40x35x27cm 1pc/ctn
RHX- IF12	12" INLINE FAN	220V/50HZ	1480m ³ /h	47x43x31cm 1pc/ctn

Plastic Inline Fan

- Color: White
- Operating temperature range: -20°C~60°C
- Long life with low energy consumption
- Without power cord built-in

CODE	DESCRIPTION	VOLTAGE FREQUENCY	AIRFLOW M ³ /H	PACKAGE
RHX- IF4P	4" Extractor Fan, Plastic	220V/50HZ	198m ³ /h	32x22.5x22cm 1pc/ctn
RHX- IF5P	5" Extractor Fan, Plastic	220V/50HZ	284m ³ /hr	32x22.5x22cm 1pc/ctn
RHX- IF6P	6" Extractor Fan, Plastic	220V/50HZ	530m ³ /h	31.5x26x25.5cm 1pc/ctn
RHX- IF8P	8" Extractor Fan, Plastic	220V/50HZ	900m ³ /hr	31.5x26x25.5cm 1pc/ctn



VENTILATION/FAN

Plastic Inline Fan With Fan Controller

- Color: white or black available
- Operating temperature range: -20°C~60°C
- Long life with low energy consumption
- 3-speed fan controller



CODE	DESCRIPTION	VOLTAGE FREQUENCY	AIRFLOW M ³ /H	PACKAGE
RHX-IF4PC	4" Extractor Fan, Plastic	220V/50HZ	198m ³ /h	32x22.5x22cm 1pc/ctn
RHX-IF5PC	5" Extractor Fan, Plastic	220V/50HZ	284m ³ /hr	32x22.5x22cm 1pc/ctn
RHX-IF6PC	6" Extractor Fan, Plastic	220V/50HZ	530m ³ /h	31.5x26x25.5cm 1pc/ctn
RHX-IF8PC	8" Extractor Fan, Plastic	220V/50HZ	900m ³ /hr	31.5x26x25.5cm 1pc/ctn

Plastic Duct Fan

- Quiet, and easy use of low energy
- 100% new ABS plastic;100% copper oil-bearing motor
- Customize logo, package available



CODE	DESCRIPTION	VOLTAGE FREQUENCY	AIRFLOW M ³ /H	PACKAGE
RHX-DF4P	4" Duct Fan, Plastic	220V/50HZ	130m ³ /h	46x32x50cm 40pcs/ctn
RHX-DF5P	5" Duct Fan, Plastic	220V/50HZ	240m ³ /h	56x28.5x50cm 40pcs/ctn
RHX-DF6P	6" Duct Fan, Plastic	220V/50HZ	320m ³ /h	66x33x60cm 40pcs/ctn

Metal Duct Fan

- Portable, lightweight and easy installed .
- Extra-long 5.5' grounded power cord
- Superior balanced blades for long service life & quiet operation



CODE	DESCRIPTION	VOLTAGE FREQUENCY	AIRFLOW M ³ /H	PACKAGE
RHX-DF4M	4" INLINE FAN	220V/50HZ	170m ³ /h	35x30x22cm 6pcs/ctn
RHX-DF6M	6" INLINE FAN	220V/50HZ	408m ³ /h	39x34x22cm 4pcs/ctn
RHX-DF8M	8" INLINE FAN	220V/50HZ	714m ³ /h	49x43x22cm 4pcs/ctn

Fan Speed Controller

- Easy to operate, easy to carry, suitable for electric tools, fans, lamps, flow pumps and other equipment.
- The electronic control of the use of the device's operating speed, flow rate, and adjust the brightness.
- Line cord: 1.8m, 3-wire, double insulated, 0.75mm². Plug: 3-pole.
- Various speed or full run

CODE	DESCRIPTION	VOLTAGE FREQUENCY	MAX. WATT	MAX. CURRENT	PACKAGE
RHX-FSC1	Controller with cord	220V/60HZ	1800W	8A	52x23x35cm 24pcs/ctn



VENTILATION/FAN



16" Wall Fan

- More uniform air circulation.
- Fit any application for home, greenhouses, garages
- Operate with less noise
- ETL With 1 year warranty

CODE	DESCRIPTION	VOLTAGE FREQUENCY	WATT	SPEED SET	Oscillating degree	PACKAGE	MOQ
RHX-WF16	16" Oscillating wall fan	220V/50HZ	60	3	80°	53x14.5x43.5cm 1pc/ctn	500


6" Desk Clip Fan

- Two speeds, non-oscillating
- Strong spring-loaded clip for multiple uses
- Typically used in grow tent by clip on poles
- Function of 3 in 1': table fan, wall fan, clip fan
- Power Cord: 1.5m
- MOQ: 1000 PCS



CODE	DESCRIPTION	VOLTAGE FREQUENCY	WATT	SPEED SET	PACKAGE	MOQ
RHX-DCF6	6" Desk Clip Fan	220V/50HZ	60	2	42.5x30.5x23cm 4pcs/ctn	1000

CARBON FILTER

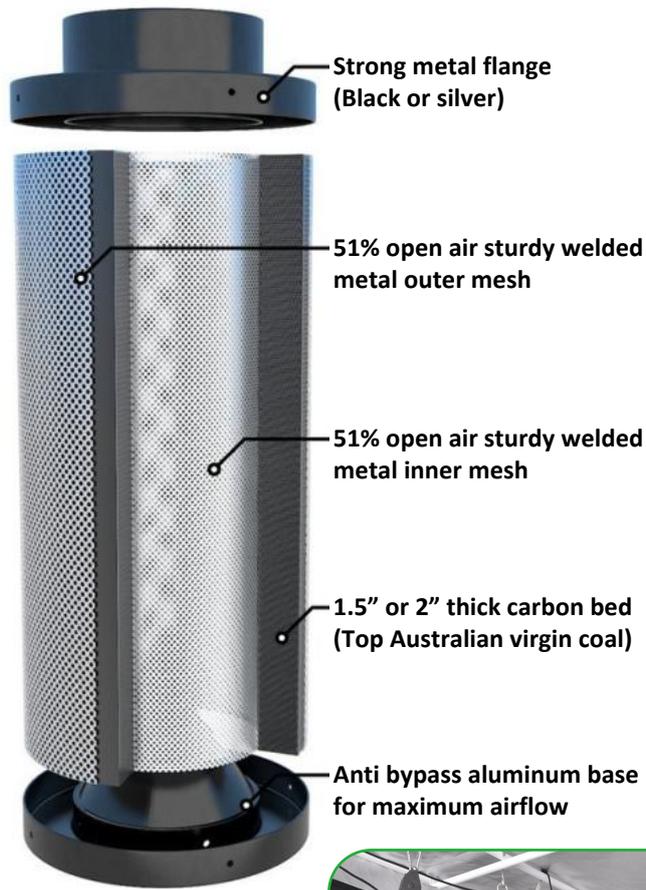

CODE	SIZE	CARBON THICKNESS	AIRFLOW CMH/CFM	PACKAGE SIZE
RHX- CF4-10	4"x10" $\Phi 100 \times 250$ MM	1.5"/2"	300/175	24x24x33cm
RHX- CF4-12	4"x12" $\Phi 100 \times 300$ MM	1.5"/2"	350/200	24x24x38cm
RHX- CF6-12	6"x12" $\Phi 150 \times 300$ MM	1.5"/2"	468/275	29x29x38cm
RHX- CF6-16	6"x16" $\Phi 150 \times 400$ MM	1.5"/2"	680/400	29x29x48cm
RHX- CF6-24	6"x24" $\Phi 150 \times 600$ MM	1.5"/2"	935/550	29x29x68cm
RHX- CF8-20	8"x20" $\Phi 200 \times 500$ MM	1.5"/2"	1190/700	34x34x58cm
RHX- CF8-24	8"x24" $\Phi 200 \times 600$ MM	1.5"/2"	1275/750	34x34x68cm
RHX- CF8-39	8"x39" $\Phi 200 \times 1000$ MM	1.5"/2"	1615/950	34x34x108cm
RHX- CF10-24	10"x24" $\Phi 250 \times 600$ MM	1.5"/2"	1445/850	39x39x68cm
RHX- CF10-39	10"x39" $\Phi 250 \times 1000$ MM	1.5"/2"	2380/1400	39x39x108cm
RHX- CF12-39	12"x39" $\Phi 300 \times 1000$ MM	1.5"/2"	2890/1700	44x44x108cm
RHX- CF12-48	12"x48" $\Phi 300 \times 1200$ MM	1.5"/2"	3740/2200	44x44x128cm
RHX- CF14-39	14"x39" $\Phi 350 \times 1000$ MM	1.5"/2"	3375/1985	49x49x108cm
RHX- CF14-48	14"x48" $\Phi 350 \times 1200$ MM	1.5"/2"	4365/2567	49x49x128cm

DUCTING

Aluminum Ducting



- Flexible length 10m for exhaust fan blower / inline fan
- 1 layer aluminum foil, Flame-retardant coating from -22 to 266 Fahrenheit
- Perfect for Heating Ventilation & Air Conditioning (HVAC)
- Quick and easy to set up.

CODE	DESCRIPTION	PACKAGE
RHX-AD4	4" 10m	11.5x11.5x42cm 1pc/ctn
RHX-AD5	5" 10m	13.5x13.5x42cm 1pc/ctn
RHX-AD6	6" 10m	16.5x16.5x38cm 1pc/ctn
RHX-AD8	8" 10m	21.5x21.5x38cm 1pc/ctn
RHX-AD10	10" 10m	26.5x26.5x38cm 1pc/ctn
RHX-AD12	12" 10m	31.5x31.5x38cm 1pc/ctn
RHX-AD12.5	12.5" 10m	33.5x33.5x38cm 1pc/ctn

PVC Ducting



- Flexible length 10m for exhaust fan blower / inline fan
- 1 layer aluminum and PVC foil, Flame-retardant handle temperatures up to 140 Degree
- Perfect for Heating Ventilation & Air Conditioning (HVAC)
- Quick and easy to set up.

CODE	DESCRIPTION	PACKAGE
RHX-PD4	4" 10m	11.5x11.5x45cm 1pc/ctn
RHX-PD5	5" 10m	13.5x13.5x45cm 1pc/ctn
RHX-PD6	6" 10m	16.5x16.5x40cm 1pc/ctn
RHX-PD8	8" 10m	21.5x21.5x40cm 1pc/ctn
RHX-PD10	10" 10m	26.5x26.5x40cm 1pc/ctn
RHX-PD12	12" 10m	32x32x40cm 1pc/ctn
RHX-PD12.5	12.5" 10m	33.5x33.5x40cm 1pc/ctn



Duct Reducer

- Durable metal with white powder coated.
- Perfectly suited for ducting your Tumble Dryer, Bathroom or Kitchen extractor fan, Hydroponics, In-Line Extract Fans

CODE	DESCRIPTION	PACKAGE	CASE
RHX-R6/4	4 to 6inch Reducer	44x44x32cm	20
RHX-R8/6	6 to 8inch Reducer	34x34x30cm	20

Duct Clamps

- Variety of applications, easy to install.
- Stainless steel and rust resistant.
- Worm drive adjustable with screwdriver for a super secure fit.
- Varies size: 4", 5", 6", 8", 10", 12", 12.5"



CO2&UV OZONE

UV Ozone Generator

- ON/OFF switch
 - Treats up to 5500 cubic feet
 - 240V Power Cord included
 - Pulls less than 1 amp of power
 - Includes UV bulb
- CODE: RHX-OG



CO2 Regulator

- 40mm high pressure gauge : 0-4000psi
 - Flowmeter: 0-15 scfh
 - Inlet connection: cga-320
 - Hose tail: suitable for 4.2 mm inside diameter hose
 - With solenoid valve and EU standard plug
- CODE: RHX-CR

CO2 Generator

- Four or eight preinstalled liquid propane or natural gas burners
- Includes gas regulator, 3.6m hose and hanging hardware
- Electronic ignition provides reliable starts
- Built-in safety tip-over switch




Natural gas/Liquid propane hose with regulator



12-VDC power supply

Hardware

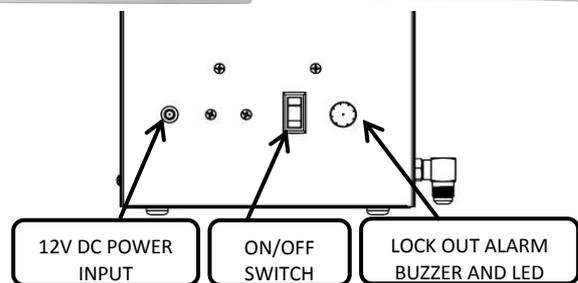

Liquid Propane (LP)							
	AreaSize (Cu Ft)	Max. CO2 (Cu Ft/Hr)	BTU Rating	Variable Output	Gas Pressure	Power	Dimensions
CG-4LP	≤3,200	13.2	2,794-11,176	1-4 burners	11" WC/2.8 kPa	12VDC	28x21.5x45.7cm
CG-8LP	>3,200	26.4	2,794-22,352	1-8 burners			28x42x45.7cm
Natural Gas (NG)							
	AreaSize (Cu Ft)	Max. CO2 (Cu Ft/Hr)	BTU Rating	Variable Output	Gas Pressure	Power	Dimensions
CG-4NG	≤3,200	12.54	3,135-12,540	1-4 burners	4.5" WC/1.15 kPa	12VDC	28x21.5x45.7cm
CG-8NG	>3,200	25.08	3,135-25,080	1-8 burners			28x42x45.7cm

GROW TENT



Classical Grow Tent

- Heavy duty 600d fabric with double stitch
- Detachable heavy duty steel poles
- Heavy duty SBS zippers
- Easy instal within 5 minutes
- Customized logo

CODE	DESCRIPTION	LIGHT SUGGESTION	TUBE SIZE	PACKAGE SIZE
RHX-GT1	24"x24"x48" (60x60x120cm), plastic Corner	1x400W COOLED	16 # *0.8	76x23x12cm
RHX-GT2	48"x24"x60" (120x60x150cm), plastic Corner	2x400W COOLED	16 # *0.8	123x23x12cm
RHX-GT3	32"x32"x63" (80x80x160cm), plastic Corner	1x600W COOLED	16 # *0.8	96x23x12 cm
RHX-GT4	36"x36"x78" (90x90x200cm), plastic Corner	1x600WCOOLED	16 # *0.8	106x25x12cm
RHX-GT5	39"x39"x78" (100x100x200cm) plastic Corner	1x1000W COOLED	16 # *0.8	116x25x12cm
RHX-GT6	48"x48"x78" (120x120x200cm), plastic Corner	1x1000W COOLED	16 # *0.8	123x25x12cm
RHX-GT7	60"x60"x78" (150x150x200cm), plastic Corner	1x1000W COOLED	16 # *0.8	153x25x12cm
RHX-GT8	78"x39"x78" (200x100x200cm), Metal Corner	2x1000W COOLED	16 # *0.8	123x28x15cm
RHX-GT9	96"x48"x78" (240x120x200cm), Metal Corner	2x1000W COOLED	16 # *0.8	123x28x17cm
RHX-GT10	78"x78"x78" (200x200x200cm), Metal Corner	4x600W COOLED	16 # *0.8	123x28x20cm
RHX-GT11	118"x59"x78" (300x150x200cm), Metal Corner	6x600W COOLED	19 # *0.8	153x28x19cm
RHX-GT12	96"x48"x78" (240x240x200cm), Metal Corner	4x1000W COOLED	19 # *0.8	123x28x17cm 123x25x11cm
RHX-GT13	118"x118"x78" (300x300x200cm), Metal Corner	4x1000W COOLED	19 # *0.8	153x28x18cm 153x28x12cm



2-in-1 Grow Tent

- No more need for two tents, germinate and grow simultaneously
- Two individual rooms, one for veg and flower and the other for starting your clones, run different lighting schedules with no interference
- The germination section features a rack which allows the use of two lights and includes two flood trays ingested to work with any 10" x 20" propagation tray
- Sturdy water-proof flood trays which act as protection for your tent's fabric and makes cleaning a breeze
- Two doors, three view windows, seven duct ports, and two velcro sealed ventilation screens, this tent can be set up to any configuration you prefer for the best grow experience

CODE	DESCRIPTION	LIGHT SUGGESTION	TUBE SIZE	PACKAGE SIZE
RHX-GT1/2in1	36" x 24" x 60" 2-in-1 Grow Tent	600W+T5	16 # *0.8	105x13x32 cm
RHX-GT2/2in1	48" x 36" x 80" 2-in-1 Grow Tent	1000W+T5	16 # *0.8	125x13x32cm
RHX-GT3/2in1	60" x 48" x 80" 2-in-1 Grow Tent	1000W+T5	16 # *0.8	155x14x32 cm

PROPAGATION

GERMINATION KITS

- Ultra-durable, high-quality made to last many seasons
- Domes and trays are NOT flimsy or brittle
- Won't crack or break while handling unlike competitors
- Heavy duty humidity dome built in vents for controlled airflow
- The station's plastic top means better humidity control for optimum growth



CODE	DESCRIPTION	CASE	PACKAGE
RHX-PD10-4	10" x 20" propagation dome, 10cm height	50	49x30x56cm
RHX-PD10-7	10" x 20" propagation dome, 17.8cm height	50	56x30x56cm
RHX-PI10	10" x 20" propagation insert, 0.7mm thickness	100	49x30x56cm
RHX-PT10-7	10" x 20" propagation trays, 0.7mm thickness	100	49x30x56cm
RHX-PT10-12	10" x 20" propagation trays, 1.2mm thickness	40	49x30x56cm



Seedling Heat Mat

- Faster germination, higher success rates, and faster growth for quicker transplanting and higher yield
- Automatically warms rooting area 10-20F over ambient temperature
- Instructions and growing tips are printed on the mat.
- Power cord length: 1.8m

CODE	DESCRIPTION	WATTAGE	CASE	PACKAGE
RHX-SHM10	10" x 20.75" Seedling Heat Mat	18	25	42x42x29.5cm
RHX-SHM20	20" x 20.75" Seedling Heat Mat	45	25	62x58x22cm
RHX-SHM40	40" x 20.75" Seedling Heat Mat	105	12	62x58x22cm

Heat Mat Thermostat

- Digital temperature controller for heat mats
- Provides constant optimum temperatures for specific crops
- Illuminated indicator light; European standard plug
- Compatible with all heat mats; optional for Seedling Heat Mats
- Celsius or Fahrenheit read-out
- CODE: RHX-HMT



TRAYS & RESERVOIRS SYSTEM

Flood Tray & Reservoirs

- Thick, rigid, durable, and easy to clean
- Arch-formed edges offer extra strength and minimal flexing.
- Professional grid design and drainage channels for speedy and thorough drainage, making cleaning easy.
- Versatility size for different demand, Normally 4x4, 3x6, 4x6, 4x8 for the tray and 50,75,100 Gallon for reservoirs.
- Virgin ABS resin. BPA Free with high impact and heat resistant



CODE	DESCRIPTION	THICKNESS	SIZE
FT4X8	Premiun Standard Flood Tray, 4' x 8'	4MM	254 x 132 x 20.4cm
FT4X6	Premiun Standard Flood Tray, 4' x 6'	4MM	193 x 132 x 20.4cm
FT3X6	Premiun Standard Flood Tray, 3' x 6'	4MM	193 x 101.6 x 20.4cm
FT4X4	Premiun Standard Flood Tray, 4' x 4'	4MM	132 x 132 x 20.4cm
FR75	Premiun Standard Reservoirs, 75Gallon/280L	6MM	130 x 100 x 35cm
FR50	Premiun Standard Reservoirs, 50Gallon/190L	6MM	115 x 85 x 35cm



Flood Tray Stand

- Heavy duty quick assembly tray stands with different size
- With white powder coated protection.
- Easy assembly without any tool.
- Suit for all popular brand trays and reservoirs with different size.
- 25inch(63cm) height and 19inch(48.5cm) from middle bar to floor.
- Caster Wheels with move and lock (for option)

CODE	DESCRIPTION	PACKAGE DIMENSION
FTS4X8	4' x 8' white powder coated	136.5x26.5x14cm
FTS4X6	4' x 6' white powder coated	136.5x25.5x14cm
FTS3X6	3' x 6' white powder coated	136.5x25.5x14cm
FTS4X4	4' x 4' white powder coated	136.5x27x11.5cm
CW4	Caster Wheels - 4 PCS	13x13x14cm
CW6	Caster Wheels - 6 PCS	13x13x14cm



ABS Flood Tray with Rolling Bench

- Labor savings and cost effective
- An entire acre or more can be watered automatically and efficiently
- Plants are watered evenly, reducing losses due to poor watering practices
- Plants can be fertilized as they are being watered
- Floors are dry, avoiding accidents
- Compatible with many computer control systems

CODE	DESCRIPTION
RHX-RTS4X32	ABS Growing Flood Tray with Rolling Metal Tables System, 4' wide, 32' length, 2.5' high
RHX-RTS5X32	ABS Growing Flood Tray with Rolling Metal Tables System, 5' wide, 32' length, 2.5' high



GROW POT

Fabric Pot

- Constructed from high quality Nonwoven fabric
- Provides great support, while allowing air to travel into the root system
- Improves drainage and provides increased airflow to prevent root system from overheating on hot days
- Provide rapid establishment after transplanting



Tan Fabric Pot

- Prevents roots from circling and enhance root structure to promote healthy root development.
- The soft, light, breathable and durable bag with sturdy handle straps allows easy and safe moving.
- Decreased risk of transplant shock.
- Provides Water drainage through the soil to eliminate over watering.
- Keeps plant warmer in winter and cooler in the summer.
- Can be washed reused and stored for future use.

CODE	DESCRIPTION	CASE	PACKAGE
RHX-FP1	Fabric Pot, 1 Gallon with handle 260g/m2	250	45x35x60cm
RHX-FP2	Fabric Pot, 2 Gallon with handle 260g/m2	250	50x45x55cm
RHX-FP3	Fabric Pot, 3 Gallon with handle 260g/m2	100	45x35x55cm
RHX-FP5	Fabric Pot, 5 Gallon with handle 260g/m2	100	45x35x60cm
RHX-FP7	Fabric Pot, 7 Gallon with handle 260g/m2	100	50x45x60cm
RHX-FP10	Fabric Pot, 10 Gallon with handle 260g/m2	50	45x35x55cm
RHX-FP15	Fabric Pot, 15 Gallon with handle 260g/m2	50	45x35x60cm
RHX-FP20	Fabric Pot, 20 Gallon with handle 260g/m2	50	50x45x55cm
RHX-FP25	Fabric Pot, 25 Gallon with handle 260g/m2	50	50x45x55cm
RHX-FP30	Fabric Pot, 30 Gallon with handle 260g/m2	50	50x45x60cm

Plastic Pot

- Impact modified plastic added for extra strength and durability
- Much thicker and more durable than traditional blow molded nursery pots and even other injection molded pots
- Wide rim with grip lip for easy movement
- MOQ:Per pallet quantity

CODE	TOP DIM	BOTTOM DIM	HEIGHT	PALLET SIZE	PALLET (PCS)	QTY / 40HC (PCS)
RHX-PP1	6.8"	5.1"	6.7"	45" x 45"	9310	186200
RHX-PP2	8.6"	6.6"	8.5"	43" x 43"	5000	100000
RHX-PP3	10.2"	7.8"	9.6"	45" x 45"	1760	35200
RHX-PP5	12.6"	9.4"	11.4"	39" x 52"	1008	21168
RHX-PP7	14"	11.4"	11.4"	43" x 43"	846	18612
RHX-PP10	16.3"	13.3"	11.8"	50" x 33"	558	12834
RHX-PP15	18.5"	14.3"	15"	38" x 38"	312	7488
RHX-PP20	22.6"	17.2"	17"	45" x 45"	196	3920
RHX-PP25	24.2"	18.3"	16.7"	38" x 47"	104	3480



Saucer

- Heavy duty saucer, compact with each size of plastic pot
- 11" saucer, 163g, 11.8" x 2" Bott: 10.2", for 5 Gallon pot
- 12" saucer, 206g, 14" x 2.08" Bott: 12.4", for 7 Gallon pot
- CODE:RHX-HDS



DRYING NET/RACK

Drying Net with Zipper



Zipper can effectively block insects and birds

Health and safety



- Environmental breathable mesh ,built-in steel wire ring that provide sturdy support, waterproof fabric
- Enclosed design,zipper design,breathable and can effectively prevent bird,insects
- Hanging loops at top so you can flip entire unit for faster drying
- Simple assembly and easy to carry

CODE	DESCRIPTION	CASE	PACKAGE
RHX-DN4Z	4 Layer Diameter-2ft(60cm),Unfolded Height-28inch(70cm),each layer-7 inch(17.8cm)	20	62x62x35cm
RHX-DN6Z	6 Layer Diameter-2ft(60cm),Unfolded Height-42inch(105cm),each layer-7 inch(17.8cm)	15	62x62x35cm
RHX-DN8Z	8 Layer Diameter-2ft(60cm),Unfolded Height-56inch(142cm),each layer-7 inch(17.8cm)	10	62x62x35cm

Easy to set up



Detachable Drying Net

- 3ft in diameter, 4-layer detachable drying net
- Environmental and non-toxic Nylon Mesh, Built-in Steel Wire Ring
- Easy to Adjust and remove
- Steel rings are sturdy as well as whippy. It is space-efficient.
- CODE: RHX-DN6

Drying Net

- 2ft 8 Layer Collapsible Dry Rack
- Dimensions: 5ft High / 2ft Diameter
- Durable Non-toxic Nylon Netting High-quality Steel Rings to provide sturdy support
- 8 individual Drying Chambers with 7" x 6.5" openings
- CODE: RHX-DN8



Square Stackable Drying Rack

- 6 Layer Stackable Drying Racks
- 29"x29" 6" per layer
- High quality washable nylon netting
- Easy assemble and take apart stackable durable construction space saving design.
- CODE: RHX-DR29-6S

CLEAN ROOM

Clean Room Body Suit


- Non-woven microporous, 150g (55gsm)
- Disposable microporous breathable protective coverall suit; durability and comfortable in non-hazardous work environment
- Elastic at cuffs, ankles, waist design; Zip front opening, serged seams and attached hood help reduce exposure
- Provide a basic barrier protection against light liquid splashes, hazardous dusts, Varnish, Resins, Fiberglass, Paints
- MOQ:1000pcs
- CODE: RHX-CRBS



Plastic Shoe Cover

- Disposable shoe covers be used to protect carpets or floors from the outside
- Inexpensive - a cheaper way to cut down on dirt and germs
- Made by machine - better quality compare to normal hand-made shoe cover
- Fits men's shoes up to size 11, easy to put on and take off
- MOQ:1000pcs

CODE	DESCRIPTION	CASE	PACKAGE
RHX-SC/P100	Plastic Shoe Cover (100/Pack)	20	50x20x36cm
RHX-SC/N100	Non-Woven Fabric Shoe Cover (100/Pack)	20	35x27x52cm
RHX-SC/P100/D	Plastic Shoe Cover (100/Pack) for Shoe Cover Dispenser	50	58x79x22cm
RHX-SC/N100/D	Non-Woven Fabric Shoe Cover (100/Pack) for Shoe Cover Dispenser	50	58x79x22cm

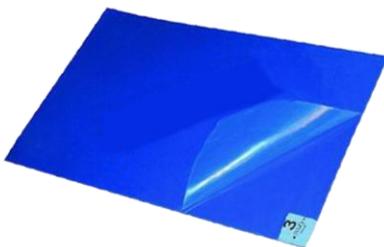

Sticky Mats

- 24 x 36 inches
- 30 Layers Per Pad
- MOQ:1000pad
- CODE:RHX-SM/2436



Disposable Scalpel

- Sold in box quantities only
- 10pcs per pack
- MOQ:1000pack
- CODE:RHX-SDS



Nitrile Glove

- FREE Finger Tip, thickness: 6 mil thick, No Powder Lubricant Added.
- 100pcs per pack
- MOQ:500pack
- CODE:RHX-NG9/6

HARVEST TOOL

Filtration Bags Kit

- Designed to safely and efficiently extract herbal resins naturally secreted by plants.
- 1 or 5 Gallon Color coded and labeled to corresponding micron size for more exact filtering to exact grades. Includes micron sizes of 25, 45, 73, 90, 120, 160, 190, and 220.
- High quality waterproof coated nylon material, and feature a built-in flexible cord for binding the filled bag.
- (1) PURPLE=25 micron (1) WHITE=45 micron (1) YELLOW=73 micron (1) BLACK=90 micron (1) ORANGE=120 micron (1) RED=160 micron (1) GREEN=190 micron (1) BLUE=220 micron
- Includes Pressing Scree Storage Bag



CODE	DESCRIPTION	CASE	PACKAGE
RHX-BB5-8	5 Gallon 8 bags (25, 45, 73, 90, 120, 160, 190, 220 micron)	13	53x48x22cm
RHX-BB5-5	5 Gallon 5 bags (25, 73, 120,160, 220 micron)	20	53x48x22cm
RHX-BB5-4	5 Gallon 4 bags (25, 73, 160, 220 micron)	25	53x48x22cm
RHX-BB5-3	5 Gallon 3 bags (25, 73, 220 micron)	34	53x48x22cm
RHX-BB1-8	1 Gallon 8 bags (25, 45, 73, 90, 120, 160, 190, 220 micron)	25	53x48x22cm
RHX-BB1-4	1 Gallon 8 bags (25, 73, 160, 220 micron)	50	53x48x22cm



Blade Scissor

- Straight or curved stainless steel.
- CODE:RHX-SBP Straight
- CODE:RHX-CBP curved



Bonsai Scissor

- 60mm Bonsai Scissor with titanium coating
- CODE:RHX-TBS60



16" Bowl Trimmer

- Sharp blade harness
- the power of 30 scissors in 1 Unit
- CODE: RHX-BT16



Trellis Netting

- Mesh Size: 6" x 6"
- CODE: RHX-TN15 Size:5ft x 15ft
- CODE: RHX-TN30 Size:5ft x 30ft



Turkey Bag

- 16"X19" 100pcs per pack
- CODE:RHX-TB16-19



Vaccum Seal Bag

- Size: 28x500cm
- RHX-VSB11

GARDEN TOOL



Air Stone

- RHX-006-40B: $\phi 30 \times 38$ mm, Small
- RHX-007-50B: $\phi 50 \times 50$ mm, Medium
- RHX-007-100B: $\phi 50 \times 100$ mm, Large



Float Valve

- Self-locking and stable. Less abrasion
 - corrosion-resistant, non-polluting
- CODE: RHX-PFV



Water Wand

- 36" - 58" Telescopic Aluminum Tube
 - Spray Pattern is aluminum Shower
 - Adjustable flow control on the handle
 - with shaped soft grips for comfort
 - easy for two hand operation
- CODE:RHX-WW36/58



Measuring Cup

- RHX-MC8: Measuring Cup 8oz / 250ml
- RHX-MC16: Measuring Cup 16oz / 500ml
- RHX-MC32: Measuring Cup 32oz / 1000ml



Rain Barrel

- RHX-RB100: 100L $\phi 40$ cm $\times 78$ cm
- RHX-RB225: 225L $\phi 60$ cm $\times 80$ cm
- RHX-RB400: 400L $\phi 70$ cm $\times 98$ cm
- RHX-RB750: 750L $\phi 98$ cm $\times 100$ cm



Plant Yoyo

- Easy to support your plants
 - Gentle on plants
 - String is 6ft in length
- CODE: RHX-PY



Plant Clips

- 10pcs Small Plant Clips and 10pcs Large Plant Clips
- CODE:RHX-PC10/10



Garden Soft Tie

- 16 ft (5 meters) of 5mm padded soft tie
- CODE: RHX-GST5/5



Garden Twist Tie

- 16 ft (5 meters) tie with cutter
- CODE: RHX-TT164

METER



Water Monitor

- PH : 0.00 ~ 14.00PH EC : 0.00 ~ 19.99EC
- °C : -50°C ~ 70°C °F : -58°F ~ 158°F
- CF : 0.0 ~ 199CF TDS : 10 ~ 19990ppm
- CODE: RHX-WM26



Large Display Therm-Hygrometer

- -10°C~+50°C (+14°F~+122°F)
- 20%RH~90%RH
- Battery included
- 2 probe (indoor and outdoor)
- CODE:THC-2



PH Meter

- 2% High Accuracy
- Measuring range: 0.00~14.00PH,
- Temp: 0°C~55°C.
- CODE:PH-035



3-Way Moisture Light & PH Meter

- Test soil's moisture, light, and pH levels with the handy 3-Way Meter.
- 1 (dry) to 10 (moist), 0 (low light) to 2000 (very strong light), and pH 3.5 (acidic) and pH 8 (basic).
- CODE: RHX-MLPM3



12" Thermometer Humidity Gauge

- -60 to 120 degrees Fahrenheit (-50 to 50 degrees Celsius)
- 20 to 90% with the dial's bright red pointers.
- CODE: RHX-THG12



3KG Digital Scale

- LCD Display with blue backlight.
- 1000g Capacity = 2.2 Pounds, Units: g/oz (0.1g increments).
- CODE:DS3



Welcome to Contact Us

Emily Lee/Sales Representative

Wenzhou Hengxiong Electric Co., Ltd.

Tel: 0086-577 6538 3588 Mobile: 0086-136 0577 4837

E-mail: sales9@chin-up.cn Skype: chinupsales9

Web: www.chin-up.cn www.chinuphydro.com

16 Years Professional Hydroponics Equipment Manufacturer

Grow light Reflector--Electronic Ballast--Ventilation Equipment--Accessories

