



OMEGA
1200TS SERIES


**Featuring 4 hydraulic powered extension decks -
providing a generous large working platform area**

- » Maximum working height 10,5 meter
- » Impressive lifting capacity - up to 3.000 kg.
- » Easy levelling capabilities, side - side / fore - aft - manual and fully automatic controls.
- » Spacious deck size - several configurations possible.
Starting at 42m² up to 60m²
- » Radiographic remote control.
- » V3307-CR - 55 kW Kubota diesel engine - fulfil STAGE V / TIER 4 Final emission standard.
- » Smooth and precise proportional drive control, with dual joystick controllers.
- » 90 degrees turret rotation.

1200TS series Track scissor

Specifications

	1220TS	1230TS
Max. working height	10,5 m	10,5 m
Max. platform height	8,5 m	8,5 m
Stowed height (top guardrails)	3,5 m	3,5 m
Stowed height (guardrails lowered)	3,0 m	3,0 m
Stowed height (guardrails removed)	2,6 m	2,6 m
Width (depending on config)	2,27 m up to 3,0 m	
Length - stowed	6,9 m	6,9 m
Track length	4,0 m	4,0 m
Lifting capacity	2.000 kg	3.000 kg
Ground clearance	35 cm	35 cm
Platform length retracted	6,9 m	6,9 m
Platform length extended	12,1 m	12,1 m
Platform width retracted (depending on config)	2,25 m up to 3,0 m	
Platform width extended (depending on config)	3,5 m up to 5,0 m	
Drive speed stowed	2 km/h	2 km/h
Gradeability	35%	35%
Weight (depending on config)	18.000 kg up to 21.000 kg	
Rotation	90 degrees hydraulic operated	
Power source	55kW Diesel engine KUBOTA V3307CR	
Levelling capabilities	5° side to side / 5° fore to aft Controls by manual - and by Auto-levelling feature	

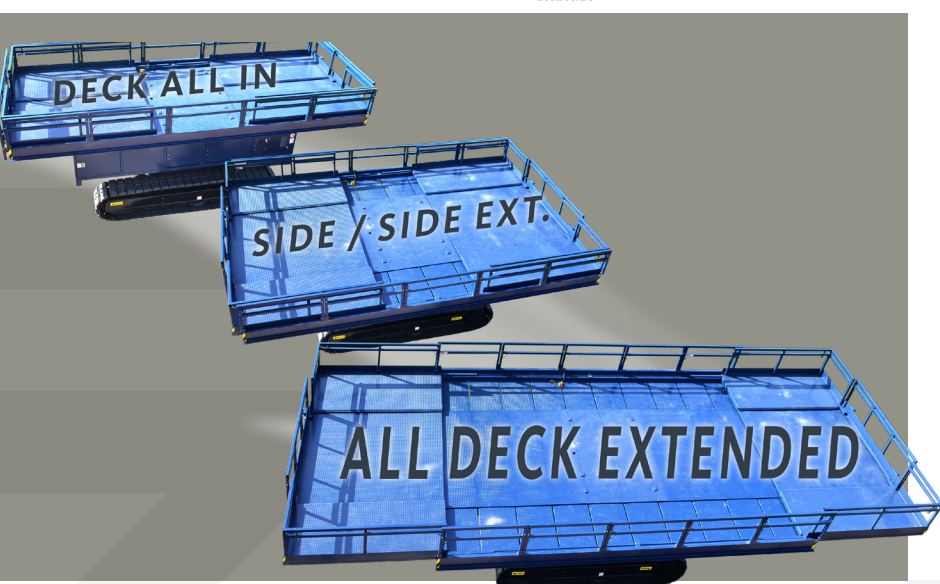

www.omegasales.eu

Standard features

- » Up to 10,5 m working height.
- » Auto and manual levelling - 5° side / side & 5° fore / aft.
- » Four hydraulic powered extension decks - featuring an widely large working space
- » Several deck configurations possible
- » Smooth precise proportional control for ALL functions.
- » Easy maintenance access to mechanical, electrical and diesel components without raising platform or swinging out trays.
- » CE compliant & Emission STAGE V compliant.
- » 90° hydraulic turret rotation



Optional features

- » Hydraulic powered generator 380 / 230 / 110 Vac - up to 6 kW
- » DC / AC convertor for 110V or 230Vac supply, up to 3 kW
- » No rotation (reduce price)
- » Custom colours
- » Rubber pads on tracks
- » Working lights

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate operators manual for detailed instructions on the proper use and maintenance.

Leemidden 21
2678 ME De Lier
The Netherlands

+ 31 174 - 525 990
sales@omegasales.eu